



Head Gates

196 1/2 E 6th St.
PO Box 1265
Sioux Falls, SD 57101

877-782-3073
www.siouxsteel.com



LIVESTOCK



Features

Solid Drive

- Linkage connects both sides of yoke.
- Eliminates cables and chains.
- Protected by dust cover for longer life.

Spring-Loaded, Self-Locking Latch

- Allows one person to control total operation.
- Spring-Loaded Yoke.

Top Latch System

- Operator releases the top forward latch and swings gate open.
- This completes the 1-2-3 step procedure: receive-lock-release.
- Cattle think they can pass through easily, but the animal can pass through or back up only when the operator allows.

Latch Release Arm

- Changed to right side or left side in minutes.
- Gate Pivot Control Handle

Optional Nose Bar

- Holds the head in firm position for easier, safer treatment, implanting, ear tagging, etc.

Optional Anchor Mat

- 8' long.

Mounting Brackets


- Fits most chutes and alleyways.
- Pre-drilled mounting brackets are "across" and "up and down".

Tube Drain

- Drains are at the bottom of uprights.
- Prevents freeze-up.

Latch Protector Strap

- Keeps animal's head from tripping latch.
- Latch guard keeps cows from accidentally releasing the gate latch.

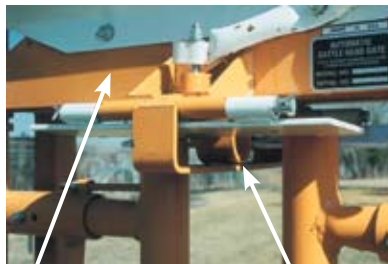

Latch guard keeps cows from accidentally releasing the gate latch.

The lengthened latch allows for wider yoke adjustment.



Specifications

WIDTH	HT.	WEIGHT	DESCRIPTION
34"	6'	192 LBS	Self Catching

**POWDER
COAT PAINT**
provides an attractive,
durable finish

The Self-Catching Headgate is manufactured from 11 gauge and 14 gauge steel tubing. For best results when using headgate, approach chute should be angled to about 45°.